


Wheel stop made from rubber granules


PROFIMAT[®] Bumpy




Advantages & properties



Collision protection from kerbs & walls



Recesses for reflectors



Integrated holes for fixing screws




Highly resistant material



Frost and weather resistant




Sustainable raw materials

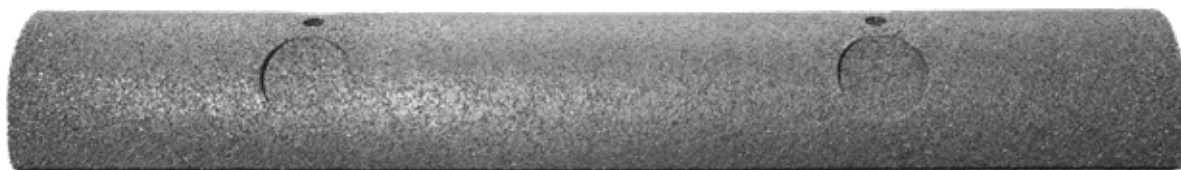

This data sheet is not subject to any updating service! All information is provided without guarantee. The current, valid version is available at www.profimat.com

page 1 of 2

PROFIMAT[®] Bumpy – data sheet

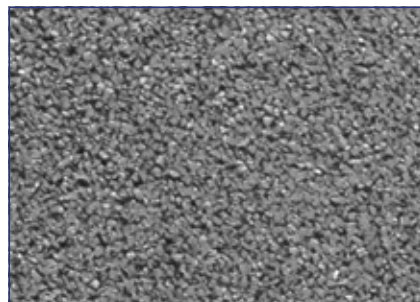

Application

PROFIMAT[®] Bumpy made of high-quality rubber granulate effectively prevents bumping into high kerbs, walls or other obstacles that cause damage to cars or other vehicles. The product is fixed to the ground at the desired distance from the obstacle by means of screwing or gluing. Holes are already pre-drilled for the screw connection. The wheel stop can also be used as an edging, speed bump or similar.

Special recesses machined into the shape can be equipped with round reflectors (Ø 60 mm) for even better visibility, especially at night.

Usual areas of use for PROFIMAT[®] Bumpy are garages, entrances and exits, parking areas, open spaces, warehouses, gardens, etc..

Product design		
Colours	grey	
Surface	granule structure	

Dimensions / Tolerances		
Length x Width	800 x 150 mm	± 1.5 %
Height	80 mm	± 0.6 mm
Weight	ca. 5.2 kg	

This data sheet is not subject to any updating service! All information is provided without guarantee. The current, valid version is available at www.profimat.com