

Washing machine mat
made from rubber granules

PROFIMAT[®] Washing Machine Mat (600 x 600 x 10/15 mm)



Advantages & properties



Reduction of noise
and vibrations



Resistant to oils,
fats and many
chemicals



Protection of the
washing machine
and tiles



Highly resistant,
durable material



Permanently
elastic



Environmentally
friendly materials



Easy cutting




Please note our
product information
www.profi-mat.com/en/wama

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profi-mat.com

Page 1 of 3

PROFIMAT[®] washing machine mat – data sheet

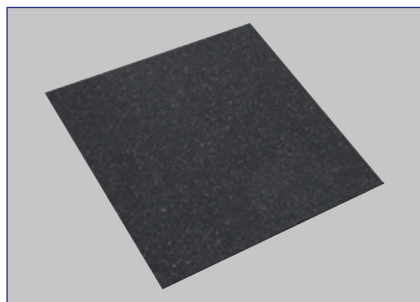

Application

The PROFIMAT[®] washing machine mat is suited as an underlay for all types of washing machines. The elastic structure effectively decouples the washing machine from the floor, reducing noise and vibrations. It also protects the washing machine and the floor coverings. It is resistant to oils, fats and many chemicals.

With its dimensions of 600 x 600 mm, it disappears almost invisibly under almost all kinds of washing machines. For smaller washing machines, the washing machine mat can also be easily cut to size with a carpet knife. It is durable and resilient, rot-proof and permanently elastic.

Please note: The washing machine mat may only be used on tiled and concrete floors.

Material

recycled rubber granules (typical rubber scent possible) bonded with polyurethane.

Product design		
Colours	black/interspersed with colour	
Surface	granule structure	

Dimensions / Tolerance		
Length	600 mm	± 1,5 %
Width	600 mm	± 1,5 %
Thickness	10/15 mm	± 0,6 mm
Density	approx. 810 kg/m ³	

This data sheet is not subject to any updating service! All information is provided without guarantee. The current, valid version is available at www.profimat.com

Page 2 of 3

Produktprüfungen		
Tensile strength	approx. 0,3 N/mm ²	(DIN EN ISO 1798)
Elongation at break	approx. 40%	(DIN EN ISO 1798)
Fire resistance	E _{fl} (B2)	(DIN EN 13501-1)
Chemical resistance	conditionally resistant to acids and bases	
Environmental resistance	rot-proof and water-resistant	
Expansion due to humidity	at least 2% (depending on moisture content and installation situation)	
Salt water resistance	resistant according to DIN EN ISO 175 and DIN EN ISO 3386-2	
UV-resistance	resistant according to DIN EN 1297 and DIN EN ISO 3386-2	
<p>Note: The PROFIMAT[®] washing machine mat is mainly used on mineral or ceramic floors (e.g. tiles, concrete, screed) as well as on untreated wooden floors. We recommend to check a compatibility to sealed or plastic containing floors (e.g. parquet, laminate, PVC or vinyl) in advance!</p>		