PROFIMAT® tyre protector 500 x 500 x 30/10 mm

Advantages & properties

- Protection from flat spots
- On-ramp assistance
- Permanently elastic
- Highly resistant, durable material
- Frost and weather resistant
- Recycled raw materials

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com

KRAIBURG Relastec GmbH & Co. KG
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany

PROFIMAT® tyre protector – data sheet

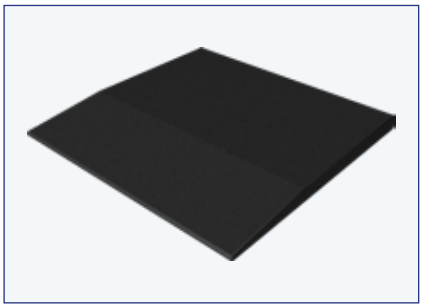

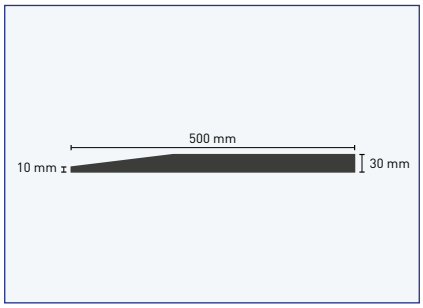

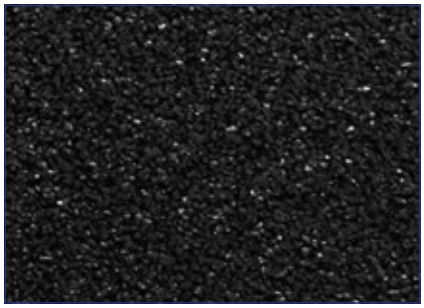

Application

PROFIMAT® tyre protectors are used to protect the tyres from flat spots. This is achieved by the special elasticity of the product. The integrated drive-on aid allows easy driving. The PROFIMAT® tyre protector is particularly suitable for seasonal vehicles that are not moved for a long time.

Material

Recycled rubber granules bound with MDI polyurethane

Product design		
Colours	red, green, black or grey Slight colour differences and fading cannot be avoided.	
Surface	smooth, beveled edge on one side	
Lower side	smooth	
Edges	beveled	

Dimensions / Tolerances		
Length x width	500 x 500 mm	± 1.5 %
Thickness	30/10 mm	± 0.6 mm
Weight	5.2 kg	

Product testing		
Certification of production facilities		
Fire behaviour	Building material class E	according to E_{fl} EN 13501-1, 2010
Resistance	conditionally resistant to acids and alkalis Saltwater resistance tested	self-assessment DIN EN ISO 175, DIN EN ISO 3386-2

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com

KRAIBURG Relastec GmbH & Co. KG
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany