# PROFIMAT® universal rubber roll 1,000 x 6,000 x 5 mm

- **ideal as temporary solution e.g. under scaffolding, stairs, temporary construction sections**
- resistant and resilient
- rot-resistant, permanently elastic
- high temperature resistance
- easy cutting with cutter knife
- made from rubber granulate, can be recycled at the end of its life




## TEMPORARY PROTECTION LAYER

The PROFIMAT® Universal Roll can be used as a temporary protective layer, e.g. under scaffolding, stairs, during temporary construction phases to protect against mechanical influences. It convinces with its quick and easy installation.

* Compatibility with waterproofing must be checked.

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com

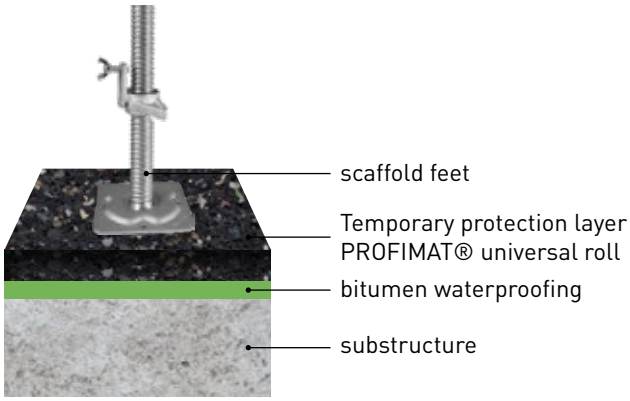

**KRAIBURG Relastec GmbH & Co. KG**
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany

# PROFIMAT® universal rubber roll – data sheet

## Application

The PROFIMAT® universal rubber roll is suited as a temporary solution, for example under scaffolding, stairs or temporary construction sections.
It is resilient, rot-resistant and permanently elastic. It also offers high temperature resistance. The rolls can easily be cut to the required size with a cutter knife. The universal rubber protection sheet is made of recycled rubber granules and can be recycled again at the end of its life. The compatibility with the waterproofing or the substrate must be checked.

## Material

recycled rubber granules (typical rubber scent possible) bonded with polyurethane.

| **Product design** | | |
|---|---|---|
| **Colours** | black/interspersed with colour | |
| **Surface** | granule structure | |

| **Dimensions / Tolerance** | | |
|---|---|---|
| **Roll width** | 1.200 mm | ± 1,5 % |
| **Roll length** | 5.000 mm | ± 1,5 % |
| **Thickness** | 5 mm | ± 0,6 mm |
| **Density** | approx. 810 kg/m³ | |

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com



**KRAIBURG Relastec GmbH & Co. KG**
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany

| Produktprüfungen | | |
|---|---|---|
| **Tensile strength** | approx. 0,3 N/mm² | (DIN EN ISO 1798) |
| **Elongation at break** | approx. 40% | (DIN EN ISO 1798) |
| **Brandverhalten** | $E_{fl}$(B2) | (DIN EN 13501-1) |
| **Chemical resistance** | conditionally resistant to acids and bases | |
| **Environmental resistance** | rot-proof and water-resistant | |
| **Expansion due to humidity** | min. 2% (depending on humidity and situation of installation) | |
| **Salt water resistance** | resistant according to DIN EN ISO 175 and DIN EN ISO 3386-2 | |
| **UV-Beständigkeit** | resistant according to DIN EN 1297 and DIN EN ISO 3386-2 | |

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com



**KRAIBURG Relastec GmbH & Co. KG**
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany