# PROFIMAT® wheelprotect XL

## Advantages & properties

Protection of tires from standing plates

Two-sided ramp aid

Permanently elastic

Highly resistant, durable material

Frost and weather resistant

Recycled raw materials

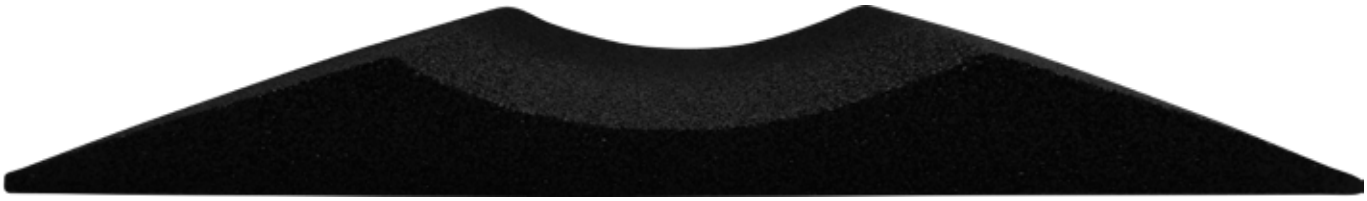

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com



**KRAIBURG Relastec GmbH & Co. KG**
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany

# PROFIMAT® wheelprotect XL – data sheet

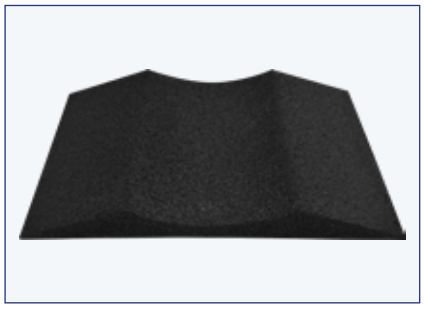

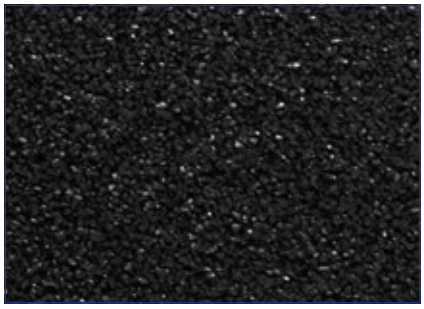

## Application

PROFIMAT® wheelprotect XL is an elastic protection pad that can protect tyres (18-22 inch) from flat spots. Due to its elasticity the tyre pad adapts itself to the tyre and offers an optimal contact surface. The product is equipped with a drive-on aid at the front and rear to ensure easy positioning of the vehicle. Due to its special shape, weight and anti-slip effect, the product remains in the intended position. A prefabricated parting line on the back makes it possible to cut PROFIMAT® wheelprotect XL in half using a cutter knife or jigsaw for even more flexible use. PROFIMAT® wheelprotect XL can be used throughout the year.
The suitability of the surface must be checked if necessary.

## Material

recycled rubber granules (typical rubber scent possible) bonded with polyurethane.

## Summary of the IPW Report 532

The flat spot investigation carried out on a single reference tyre in comparison with a reference tyre on a single comparison object clearly confirmed the client's thesis in the selected test configuration: The tyre liner „PROFIMAT® wheelprotect XL" has contributed to reducing the intensity of the dynamic force variation by more than 25%.

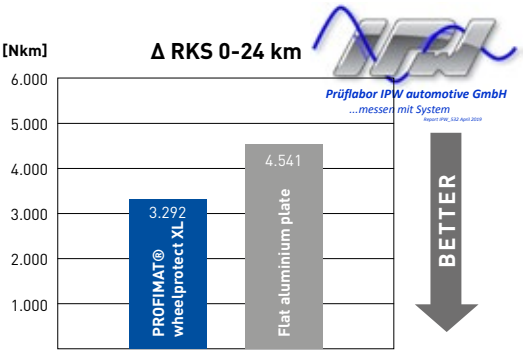


This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com



**KRAIBURG Relastec GmbH & Co. KG**
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany

| Product design | | |
|---|---|---|
| **Colours** | black | |
| **Surface** | granule structure | |

| Dimensions / Tolerance | | |
|---|---|---|
| **Length x Width** | 600 x 400 mm (approved, IPW report 532)<br>600 x 200 mm (available on request) | ± 1.5 % |
| **Height** | 65 mm | ± 0.6 mm |
| **Weight** | approx. 7.1 kg/unit<br>approx. 3.55 kg/unit (with central separation) | |

This data sheet is not subject to any updating service! All information is provided without guarantee.
The current, valid version is available at www.profimat.com



**KRAIBURG Relastec GmbH & Co. KG**
Fuchsberger Str. 4 • 29410 Salzwedel
www.profimat.com
profimat@kraiburg-relastec.com

Made in Germany